

NEW


PAGE 246-247

DIN 6537K

3XD

353TA - 353HTA - 353SUH - 353ALH - 353HRC (m7)

Ø mm	1~3	3.1~6	6.1~10	10.1~18	18.1~20
tol. D µ	+12 / +2	+16 / +4	+21 / +6	+25 / +7	+29 / +8

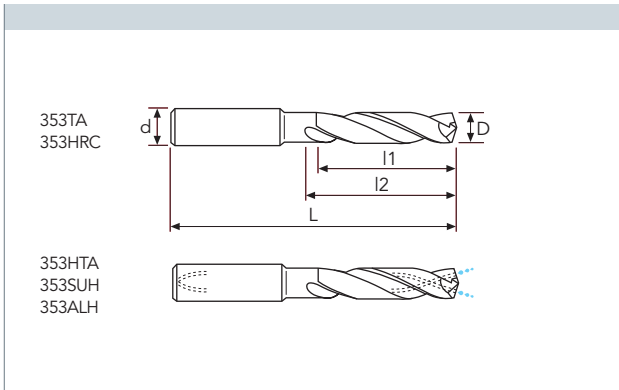

TA	HTA	SUH	ALH	HRC
MG	MG	MG	MG	MG
PV200	PV200	PV300	LAPPED	PV1000
140°	140°	140°	140°	150°
30°	30°	30°	30°	15°

D(m7)	d(h6)	l1	l2	L	Stock	Stock	Stock	Stock	Stock
mm 2.60	6	14	20	62	●	●	●	●	●
3.00	6	14	20	62	●	●	●	○	●
3.10	6	14	20	62	●	●	●	○	●
3.20	6	14	20	62	●	●	●	○	●
3.30	6	14	20	62	●	●	●	●	●
3.40	6	14	20	62	●	●	●	●	●
3.50	6	14	20	62	●	●	●	●	●
3.60	6	14	20	62	●	●	●	○	●
3.70	6	14	20	62	●	●	●	○	●
3.80	6	17	24	66	●	●	●	●	●
3.90	6	17	24	66	●	●	●	○	●
4.00	6	17	24	66	●	●	●	●	●
4.10	6	17	24	66	●	●	●	○	●
4.20	6	17	24	66	●	●	●	●	●
4.30	6	17	24	66	●	●	●	●	●
4.40	6	17	24	66	●	●	●	○	●
4.50	6	17	24	66	●	●	●	●	●
4.60	6	17	24	66	●	●	●	○	●
4.70	6	17	24	66	●	●	●	○	●
4.80	6	20	28	66	●	●	●	●	●
4.90	6	20	28	66	●	●	●	○	●
5.00	6	20	28	66	●	●	●	●	●
5.10	6	20	28	66	●	●	●	●	●
5.20	6	20	28	66	●	●	●	●	●
5.30	6	20	28	66	●	●	●	○	●
5.40	6	20	28	66	●	●	●	○	●
5.50	6	20	28	66	●	●	●	●	●
5.60	6	20	28	66	●	●	●	○	●
5.70	6	20	28	66	●	●	●	○	●
5.80	6	20	28	66	●	●	●	●	●
5.90	6	20	28	66	●	●	●	○	●
6.00	6	20	28	66	●	●	●	●	●
6.10	8	24	34	79	●	●	●	○	●
6.20	8	24	34	79	●	●	●	●	●
6.30	8	24	34	79	●	●	●	○	●
6.40	8	24	34	79	●	●	●	○	●

● stock standard ○ non-standard stock ■ stock exhaustion

TYPHOON

- C-SD-TA
- LFTA
- SUTA
- HSS-HSS/CO DRILLS
- UH RED
- MEX ORANGE
- HF EVO
- MEF ENDLESS
- ALU
- MDC
- G2
- MDTA
- ULTRA MILLS
- HSS/CO
- CARBIDE BURRS
- PARAMETERS