

NEW

PAGE 246-247

DIN 6537L



5XD

355TA - 355HTA - 355SUH - 355ALH - 355HRC (m7)

Ø mm	1~3	3.1~6	6.1~10	10.1~18	18.1~20
tol. D µ	+12 / +2	+16 / +4	+21 / +6	+25 / +7	+29 / +8

385UH (h7)

Ø mm	1~3	3.1~6	6.1~10	10.1~18	18.1~20
tol. D µ	0 / -10	0 / -12	0 / -15	0 / -18	0 / -21

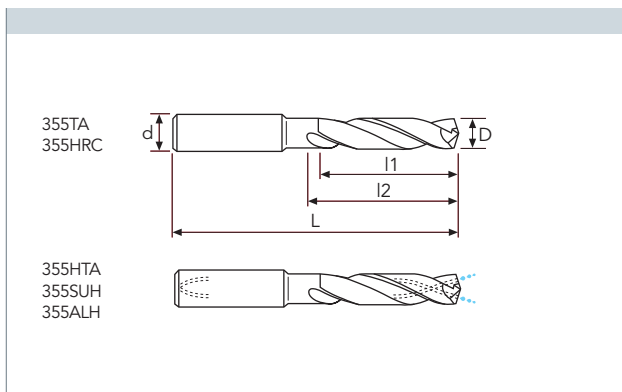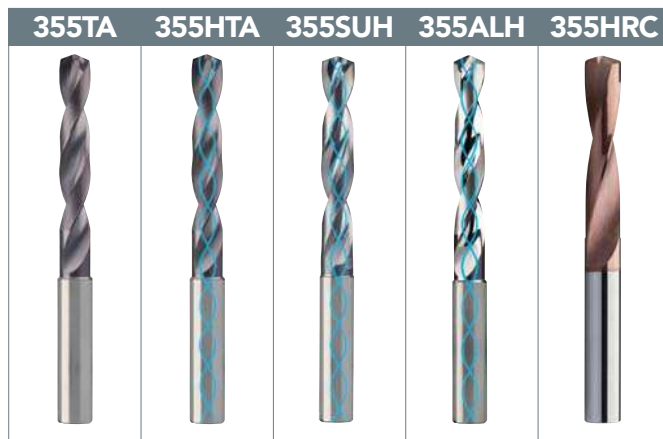

TA	HTA	SUH	ALH	HRC
MG	MG	MG	MG	MG
PV200	PV200	PV300	LAPPED	PV1000
140°	140°	140°	140°	150°
30°	30°	30°	30°	15°

D	d(h6)	l1	l2	L	Stock	Stock	Stock	Stock	Stock
mm 2.60	6	23	28	66					○
3.00	6	23	28	66	●	●	●	●	○
3.10	6	23	28	66	●	●	●	○	
3.20	6	23	28	66	●	●	●	●	
3.25 NEW	6	23	28	66		●			
3.30	6	23	28	66	●	●	●	●	○
3.40	6	23	28	66	●	●	●	●	○
3.50	6	23	28	66	●	●	●	●	○
3.60	6	23	28	66	●	●	●	○	
3.70	6	23	28	66	●	●	●	●	○
3.80	6	29	36	74	●	●	●	●	○
3.90	6	29	36	74	●	●	●	●	
4.00	6	29	36	74	●	●	●	●	○
4.10	6	29	36	74	●	●	●	○	○
4.20	6	29	36	74	●	●	●	●	○
4.30	6	29	36	74	●	●	●	●	○
4.40	6	29	36	74	●	●	●	○	
4.50	6	29	36	74	●	●	●	●	○
4.60	6	29	36	74	●	●	●	○	○
4.65 NEW	6	29	36	74		●			
4.70	6	29	36	74	●	●	●	○	
4.80	6	35	44	82	●	●	●	●	○
4.90	6	35	44	82	●	●	●	○	
5.00	6	35	44	82	●	●	●	●	○
5.10	6	35	44	82	●	●	●	●	○
5.20	6	35	44	82	●	●	●	●	○
5.30	6	35	44	82	●	●	●	○	○
5.40	6	35	44	82	●	●	●	○	
5.50	6	35	44	82	●	●	●	●	○
5.55 NEW	6	35	44	82		●			
5.60	6	35	44	82	●	●	●	○	○
5.70	6	35	44	82	●	●	●	○	
5.80	6	35	44	82	●	●	●	●	○
5.90	6	35	44	82	●	●	●	○	
6.00	6	35	44	82	●	●	●	●	○
6.10	8	43	53	91	●	●	●	○	○

● stock standard ○ non-standard stock ■ stock exhaustion

- TYPHOON
- C-SD-TA
- LFTA
- SUTA
- HSS-HSS/CO DRILLS
- UH RED
- MEX ORANGE
- HF EVO
- MEF ENDLESS
- ALU
- MDC
- G2
- MDTA
- ULTRA MILLS
- HSS/CO
- CARBIDE BURRS
- PARAMETERS