



**OSAWA  
NORM**

**8XD**




4 guide chamfers  
4 fasi  
4 Führungsfasen  
4 listels  
4 márgenes  
4 фазы

**3584HTA**



**3584HTA (m7)**

Ø mm	1~3	3.1~6	6.1~10	10.1~18	18.1~20
tol. D µ	+12 / +2	+16 / +4	+21 / +6	+25 / +7	+29 / +8

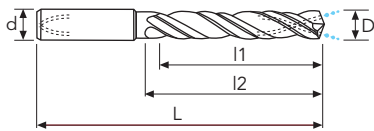

D(m7)	d(h6)	I1	I2	L	Stock
mm 3.00	6	32	40	85	●
3.10	6	32	40	85	○
3.20	6	32	40	85	●
3.30	6	32	40	85	●
3.40	6	32	40	85	○
3.50	6	32	40	85	●
3.60	6	36	40	85	○
3.70	6	36	40	85	●
3.80	6	36	40	85	●
3.90	6	36	40	85	○
4.00	6	38	46	85	●
4.10	6	38	46	85	●
4.20	6	38	46	85	●
4.30	6	40	46	97	●
4.40	6	40	46	97	○
4.50	6	44	46	97	●
4.60	6	44	46	97	●
4.70	6	44	46	97	○
4.80	6	44	46	97	●
4.90	6	44	46	97	○
5.00	6	48	57	97	●
5.10	6	48	57	97	●
5.20	6	48	57	97	●
5.30	6	48	57	97	○
5.40	6	48	57	97	○
5.50	6	48	57	97	●
5.60	6	48	57	97	●
5.70	6	48	57	97	○
5.80	6	48	57	97	●
5.90	6	48	57	97	●
6.00	6	48	57	97	●
6.10	8	64	76	116	●
6.20	8	64	76	116	●
6.30	8	64	76	116	●
6.40	8	64	76	116	○
6.50	8	64	76	116	●

● stock standard   ○ non-standard stock   ■ stock exhaustion

TYPHOON

C-SD-TA

LFTA

SUTA

HSS-HSS/CO DRILLS

UH RED

MEX ORANGE

HF EVO

MEF ENDLESS

ALU

MDC

G2

MDTA

ULTRA MILLS

HSS/CO

CARBIDE BURRS

PARAMETERS