



**OSAWA
NORM**

8XD




4 guide chamfers
4 fasi
4 Führungsfasen
4 listels
4 márgenes
4 фазы

3584HTA



3584HTA (m7)

Ø mm	1~3	3.1~6	6.1~10	10.1~18	18.1~20
tol. D µ	+12 / +2	+16 / +4	+21 / +6	+25 / +7	+29 / +8

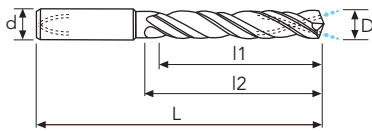

D(m7)	d(h6)	I1	I2	L	Stock
mm 10.50	12	96	114	163	●
10.80	12	96	114	163	●
11.00	12	96	114	163	●
11.20	12	96	114	163	●
11.30	12	96	114	163	○
11.50	12	96	114	163	●
11.80	12	96	114	163	●
12.00	12	96	114	163	●
12.20	14	112	133	182	●
12.50	14	112	133	182	●
12.80	14	112	133	182	●
13.00	14	112	133	182	●
13.50	14	112	133	182	●
14.00	14	112	133	182	●
14.50	16	128	152	204	●
15.00	16	128	152	204	●
15.50	16	128	152	204	●
16.00	16	128	152	204	●

● stock standard ○ non-standard stock ■ stock exhaustion

- TYPHOON
- C-SD-TA
- LFTA
- SUTA
- HSS-HSS/CO DRILLS
- UH RED
- MEX ORANGE
- HF EVO
- MEF ENDLESS
- ALU
- MDC
- G2
- MDTA
- ULTRA MILLS
- HSS/CO
- CARBIDE BURRS
- PARAMETERS