

PAGE 248

**OSW
NORM**


3XD

C-SD-TA 90° C-SD-TA 120°



C-SD-TA (h6)

Ø mm	1~3	3.1~6	6.1~10	10.1~18	18.1~20
tol. D μ	0 / -6	0 / -8	0 / -9	0 / -11	0 / -13

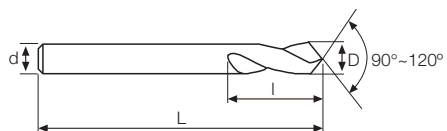

MG	MG
PV200	PV200

D(h6)	d(h6)	l	L	Stock	Stock
mm 6.00	6	16	50	●	●
8.00	8	20	64	●	●
10.00	10	25	70	●	●
12.00	12	25	75	●	●
16.00	16	26	90	●	●
20.00	20	35	100	○	○

● stock standard ○ non-standard stock ■ stock exhaustion