


n **Vf**
PAGE 250

DIN 1897

118N - 218NVA (h8)

Ø mm	1~3	3.1~6	6.1~10	10.1~18	18.1~20
tol. D µ	0 / -14	0 / -18	0 / -22	0 / -27	0 / -33

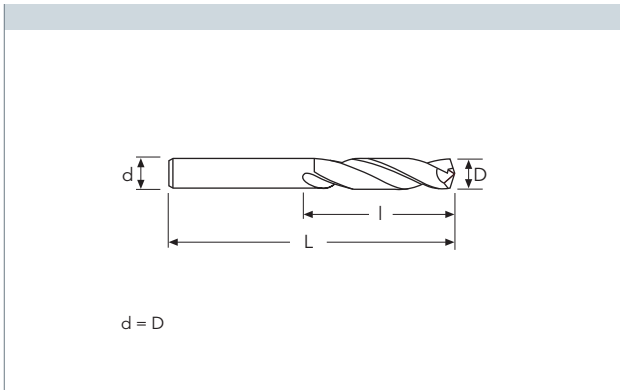

HSS	HSS/CO
OX	HT

D(h8)	I	L		Stock	Stock
mm 4.00	22	55	10	●	●
4.10	22	55	10	●	●
4.20	22	55	10	●	●
4.25	22	55	10	●	●
4.30	24	58	10	●	●
4.40	24	58	10	○	○
4.50	24	58	10	●	●
4.60	24	58	10	●	●
4.70	24	58	10	●	○
4.75	24	58	10	●	○
4.80	26	62	10	●	●
4.90	26	62	10	●	○
5.00	26	62	10	●	●
5.10	26	62	10	●	●
5.20	26	62	10	●	●
5.25	26	62	10	●	○
5.30	26	62	10	●	○
5.40	28	66	10	●	○
5.50	28	66	10	●	●
5.60	28	66	10	●	○
5.70	28	66	10	●	○
5.75	28	66	10	●	○
5.80	28	66	10	●	○
5.90	28	66	10	○	○
6.00	28	66	10	●	●
6.10	31	70	10	●	○
6.20	31	70	10	●	○
6.25	31	70	10	●	○
6.30	31	70	10	●	○
6.40	31	70	10	●	○
6.50	31	70	10	●	●
6.60	31	70	5	○	○
6.70	31	70	5	●	●
6.75	34	74	5	●	●
6.80	34	74	5	●	●
6.90	34	74	5	●	○

● stock standard ○ non-standard stock ■ stock exhaustion

- TYPHOON
- C-SD-TA
- LFTA
- SUTA
- HSS-HSS/CO DRILLS
- UH RED
- MEX ORANGE
- HF EVO
- MEF ENDLESS
- ALU
- MDC
- G2
- MDTA
- ULTRA MILLS
- HSS/CO
- CARBIDE BURRS
- PARAMETERS